


### **MEMORY HILOGGER 8423**



# Fast 10-ms Sampling Up to 600 Channels Data Logging

MEMORY HiLOGGER Model 8423 is a data acquisition system capable of measuring and recording multiple channels at high speed. Acquired data can be easily analyzed on a personal computer. This model is ideal for acquiring data for evaluation and testing at development sites. If your evaluation needs require faster data sampling than was available with former HIOKI MEMORY HILOGGERs, or if you just need more measurement channels, this model has the capabilities you want.

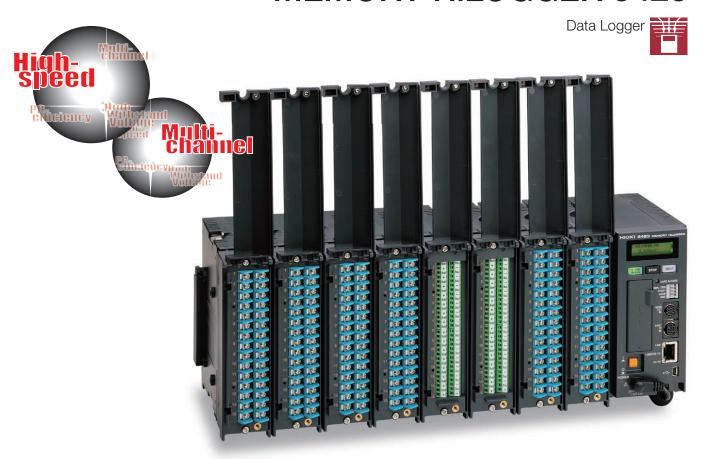







 Insulation withstand voltage between the measurement channels in each module is 200 V (Model 8948)

In the development of electric and hybrid automobiles, the need to capture sudden swings in various loads requires a measurement instrument with multi-channel high-speed sampling capability. For this purpose, HIOKI has developed a very economical logger that can measure with

10-ms sampling interval on all channels. Also included is a dual-sampling function that can measure at two different sampling rates simultaneously. This new model can follow waveforms that former 100-ms-sampling instruments could not.



Sudden-load-change testing of a fuel cell employs dual sampling to measure with 10-ms (upper trace) and 100-ms sampling (lower trace). (Timebase: 50 ms/div).




A 5-Hz pulse waveform is measured using dual sampling: 10-ms (upper trace) and 100-ms sampling (lower trace) (Timebase: 50 ms/div).

- Expandable up to 120 channels with a single instrument
- Up to five instruments can be connected for measuring up to 600 channels
- Isolated to sustain up to 600 V between modules and earth

Temperature distribution is measured to evaluate air conditioning systems during development. A system to acquire data on up to 600 channels can be constructed with merely a LAN or USB connection, providing highly detailed temperature distribution measurements.

With all channels isolated and a 600V AC/DC maximum rated voltage to earth, even when the common mode voltage increases as is common with layered batteries, the voltage of each individual battery cell can be safely measured.

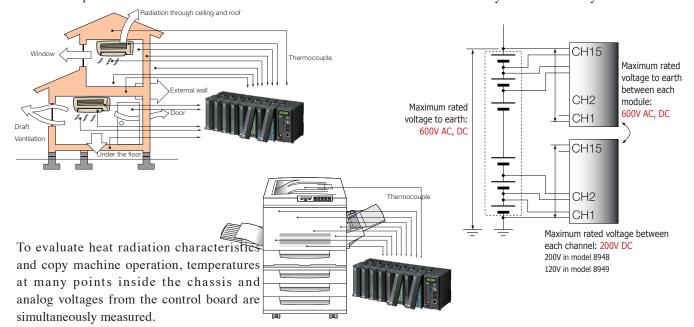

## "Simplicity" as a Design Concept





### Installation

Because the terminal blocks are designed to be removable, thermocouples can be connected to the terminal block in hand before connecting the block to a HiLOGGER input module, with just one touch.

Easily add input modules: just align and mate the connectors on the left side of the instrument assembly, and turn the metal clasp. For added strength, attach the supplied mounting bracket on the rear, or attach a standard DIN rail to the rear for tray or rack mounting.













Mounting with a standard DIN rail is supported.



### **Measurement configuration settings**


Logger configuration settings are made from a computer running the supplied application program. Settings can be easily made using familiar PC operations. To keep the process simple, the user is guided sequentially through the setting items.



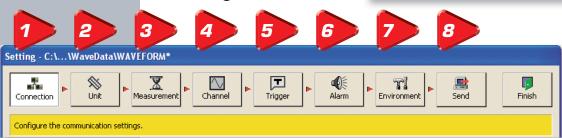

### 3

### View your data even while measuring!

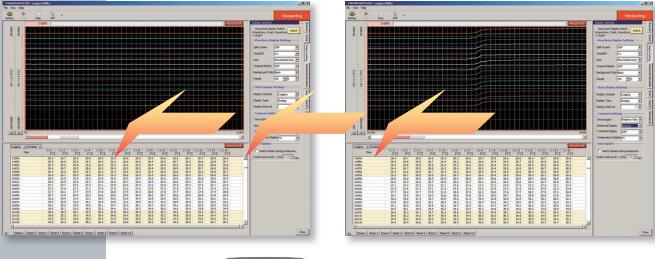




Data is recorded on the computer in real time using the supplied Logger Utility PC application program. View a trend graph in a window and scroll back to view earlier waveform data, even while recording.

Entire Recording Length: 1 s/div

### Post-measurement analysis (New Double-Thumb function\*)


The newly developed Double-Thumb function simplifies analysis. Two windows are displayed side by side, each with a scroll bar at the bottom containing a thumb (scroll box) that corresponds to the length and position of that window's displayed segment within the overall waveform. The thumbs in the scroll bars of the waveform display windows show you the position of the segments at a glance, greatly simplifying scrolling operations.

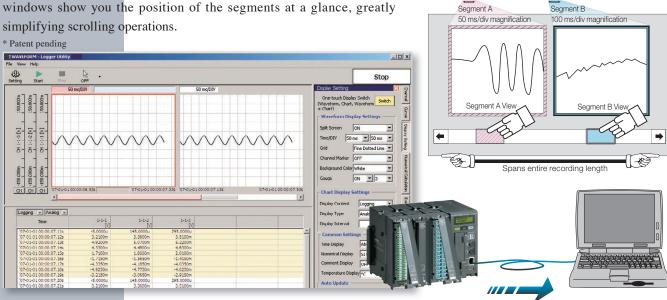

### **More Functional Details**

### Universal isolated inputs for temperature, voltage and pulses \*1 Pt (platinum resistance temperature sensor) and humidity measurements require UNIVERSAL UNIT 8949 \*2 Requires optional HUMIDITY SENSOR 9701

With the modular input design, you can select the input modules appropriate for your measurement application. Select from voltage and temperature (thermocouple or Pt input\*1) and humidity.\*1 \*2 Also, Digital Pulse Module 8996 provides 15 input channels for totalization/ rotation counts and Hi/Lo logic measurements. In addition to interchannel input isolation, the PC connection interface is completely isolated from the measurement terminals, minimizing shock hazards and interference even when measuring thermocouple and voltage inputs at the same time.

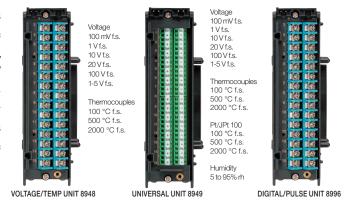

### Real-time saving to CF Card

Each measurement can be saved to a CF Card in real time. Continuous long-term recording can be performed with high capacity CF Cards up to 1 GB. Data can be viewed on a PC using the supplied Logger Utility program.

#### Enhanced data protection from power failures

This exclusive technology has been developed to preserve data as reliably as possible in the event of a power failure, by incorporating memory card technology with the know-how built into the MEMORY HILOGGER 8420-50, 8421-50 and 8422-50 series. The 8423 emphasizes the existing HiLOGGER functions and maintains internal supply voltage with a large

internal capacitor until all data has been saved to the card, resulting in greater reliability when acquiring large amounts



A CF Card slot is included as a standard feature, supporting HIOKI CF Cards up to 1 GB (operation with non-HIOKI-brand cards is not guaranteed). Using a CF Card, instrument settings can be easily copied from one 8423 to another.

#### Recording Times with a 256 MB Card (Voltage, Temperature and Humidity Measurements, but no Pulse Channels)

•		` `	. 1	,	,
Recording	256MB	256MB	256MB	256MB	256MB
intervals	(using 1 channel)	(using 15 channels)	(using 30 channels)	(using 60 channels)	(using 120 channels)
10ms	15 d 12 h 49 min	1 d 00 h 51 min	12 h 25 min	6 h 12 min	3 h 06 min
20ms	31 d 01 h 39 min	2 d 01 h 42 min	1 d 00 h 51 min	12 h 25 min	6 h 12 min
50ms	77 d 16 h 08 min	5 d 04 h 16 min	2 d 14 h 08 min	1 d 07 h 04 min	15 h 32 min
100ms	155 d 08 h 16 min	10 d 08 h 33 min	5 d 04 h 16 min	2 d 14 h 08 min	1 d 07 h 04 min
200ms	310 d 16 h 32 min	20 d 17 h 06 min	10 d 08 h 33 min	5 d 04 h 16 min	2 d 14 h 08 min
500ms	"★"	51 d 18 h 45 min	25 d 21 h 22 min	12 d 22 h 41 min	6 d 11 h 20 min
1s	"★"	103 d 13 h 30 min	51 d 18 h 45 min	25 d 21 h 22 min	12 d 22 h 41 min
10s	"★"	"★"	"★"	258 d 21 h 47 min	129 d 10 h 53 min
1min	"★"	"★"	"★"	"★"	"★"
10min	"★"	"★"	"★"	"★"	"★"
1hour	"★"	"★"	"★"	"★"	"★"

Note: Actual CF data capacity is less than total CF storage capacity, and waveform file headers are not included in these calculated values, so we recommend using 90% of these values for estimation purp Note: "★" Periods longer than 1 year is abbreviated.


#### Recording Times with a 256 MB Card (Pulse Channels use only)

Recording	256MB	256MB	256MB	256MB	256MB
intervals	(using 1 channel)	(using 15 channels)	(using 30 channels)	(using 60 channels)	(using 120 channels)
10ms	7 d 18 h 24 min	12 h 25 min	12 h 25 min	6 h 12 min	3 h 06 min
20ms	15 d 12 h 49 min	1 d 00 h 51 min	1 d 00 h 51 min	12 h 25 min	6 h 12 min
50ms	38 d 20 h 04 min	2 d 14 h 08 min	2 d 14 h 08 min	1 d 07 h 04 min	15 h 32 min
100ms	77 d 16 h 08 min	5 d 04 h 16 min	5 d 04 h 16 min	2 d 14 h 08 min	1 d 07 h 04 min
200ms	155 d 08 h 16 min	10 d 08 h 33 min	10 d 08 h 33 min	5 d 04 h 16 min	2 d 14 h 08 min
500ms	"★"	25 d 21 h 22 min	25 d 21 h 22 min	12 d 22 h 41 min	6 d 11 h 20 min
1s	"★"	51 d 18 h 45 min	51 d 18 h 45 min	25 d 21 h 22 min	12 d 22 h 41 min
10s	"★"	"★"	"★"	258 d 21 h 47 min	129 d 10 h 53 min
1min	"★"	"★"	"★"	"★"	"★"
10min	"★"	"★"	"★"	"★"	"★"
1hour	"★"	"★"	"★"	"★"	"★"

Note: Actual CF data capacity is less than total CF storage capacity, and waveform file headers are not included in these calculated values, so we recommend using 90% of these values for estimation purposes

Note: "★" Periods longer than 1 year is abbreviated.


### **Trigger function**




Level, Window and Logic trigger functions are provided. You can have one criterion start recording and another stop recording.

### **Dual Sampling**

Two different measurement intervals can be specified at the same time (one interval setting per input module). Using dual sampling, the appropriate measurement interval can be set for each type of object to be measured, optimizing use of internal memory and CF Card capacity.



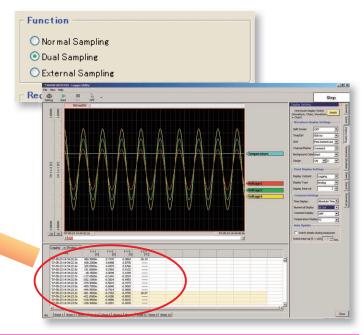

### **Enhanced PC Interface**



### **USB Port Included**

A USB 2.0 (mini-B connector) port is included as standard. The **8423** instrument and a PC can be connected by a USB cable (A to mini-B) for transferring **8423** operating settings and data.



### **LAN Terminal Included**

A 100Base-TX LAN terminal is included as standard. The **8423** instrument and a PC can be connected by a LAN cable for transferring **8423** operating settings and data.

### **External Control Inputs Included**



Input terminals are provided for external triggering, external start and stop and external sampling. External signals can be applied as a trigger source and to start and stop measurements, so data can be acquired by controlled sampling timing.


Note: External triggering and external sampling share a common terminal, so only one of these control input types can be used at a time.

### **More Functional Details**

### **All-Channel Synchronous Measurement Capability**

When measuring up to 120 channels on combined modules, all input channels are sampled synchronously. When multiple **8423**s are connected via LAN or USB for measuring up to 600 channels, the sampling of each instrument in the system can be synchronized using optional Connection Cable Model **9683**. As well as PC-based data collection, measurement start and stop can be controlled by the [START/MARK] and [STOP] keys on a master **8423**.


Note: Any 8423 may be designated as the master. Only the initial acquisition criteria setting needs to be performed on a PC via USB or LAN.

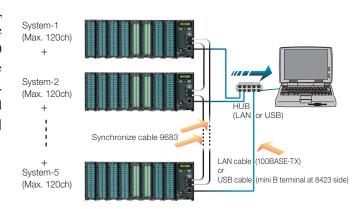

### **Enhanced Noise Immunity**

A delta-sigma type A/D converter has been incorporated in the measurement circuitry. The effects of previously problematic inverter switching noise and 50/60 Hz hum noise have been greatly reduced by the digital filtering function using the oversampling principle inherent in this type of device.

Note: Optimum noise suppression is obtained with recording intervals of two seconds or longer

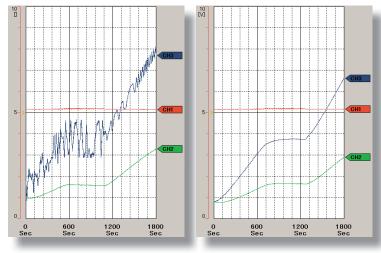

### ■ Product Specifications \_




Display  LCD, 16 characters 2 lines, 5 x 8 dots / characters  Memory Capacity  Total 16 Move of the lines in Framition shows 2 angent seed  Possibility of the lines of lines of the lines of the lines of the lines of the lines of lines of the lines of lines of the lines of l	8423 Hardware Sr	Decifications (accuracy is specified @23 ±5°C/73 ±9°F, 30 to 80 % rh, from 30 minutes after power on, accuracy guaranteed for one year, product guaranteed for one year)
Memory capacity  Feed 15 Meson with the Common Service Search work  Pack-harm any price price and prefer in Search 15 Control (Search and Search and Searc		
Publishation type treminal blocks: External largeing impair inactains ORE, External supring impair factorists (IRE, External supring impair in comparison of the control of	• •	
Clock   Aux calendar, leap year must distinguish, Precision : ±0.2x/ day at power OFF at 23 °C 75 °F)	External control connectors	Push-button type terminal block: External trigger/ External sampling input (exclusive OR), External start input, External stop input  External sampling: rise-up, or fall-down (selectable)  Rise-up: Low (0 to 1.0 V) to High (2.5 to 5.0 V)  Fall-down: High (2.5 to 5.0 V) to Low (0 to 1.0 V), or terminal short  Input voltage range: -5 to 10 V DC, Filter ON/OFF possible  Pulse width response: Over 1 ms at "H", over 2 µs at "L" (at filter OFF), Over 2.5 ms at "H", over 4 ms at "L" (at filter ON)  Maximum external sampling period: 10 ms (at digital filter OFF), 20 ms (at digital filter OFF, and synchronous measurement), 5 s (at digital filter ON, and combined with humidity measurement)
Accuracy of timebase #0.24 day on measurement (or 23 °C73*F)  Recording intervals  Set to orbitrary length or collisions, 20ms, 30ms, 30ms, 30ms, 30ms, 10ms, 15. 2s. 5s, 10s, 20s, 30s, 1min, 2min, 5min, 10min, 30min, 30min, 10min, 11h ets to the whos considered with based by measurement and the second of the set of the second of the sec	Clock	
Recording intervals  Recording longth  Manual Storage (1985)  Recording longth  Continue, Spent, Timer measurement  Recording mode  Number of data  Durability of battery for clock and string conditions: Data strings: 1 at 16 mega datas in internal memory (se one channel recording. For a channels, 1:6 M. datas / n. data  Proposed (1985)  March (1985)		
Recording length Recording mode Continue, Repeat, Timer measurement Number of data Durability of battery Recording shadow Continue, Repeat, Timer measurement Number of data Durability of battery Recording shadow No. of connectable units Saximum 8 units (cotal 120 channels) Environmental conditions Operating temperature and bunding y 0.07 io 40°C (1977), 30°t 80°d in, Storage temperature and humidity : 10.0773 F9 No. of connectable units Saximum 8 units (cotal 120 channels) Conforming standards Doprability of battery No. of connectable units Saximum 8 units (cotal 120 channels) Conforming standards September supply Operating standards September supply Operating standards September supply Outling the Ac OADETER 9418-15, 100 to 240 VAC, 5060 Hz (2) 12 V Battery (voltage may range from -20% to a30%, Please contact HIOK1 for connection cord) Operating Manual x1, Quick Sax Manual x1, AC ADAPTER 9418-15 x1, USB cable x1, Connection Plate x1, CD-R (data collection software 'Logger Utility') x1. Connector cover x1, Ferrite clamp x1  PC Interface Data storage media Interface LAN: supports 100Base-TX, DHCP, DNS USB: Ver 2.0, mini-B receptacle LAN: supports 100Base-TX, DHCP, DNS USB: Ver 2.0, mini-B receptacle LAN: supports 100Base-TX, DHCP, DNS USB: Ver 2.0, mini-B receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquisited to internal memory and CF Cards downloaded vi FF Per Ffunction; simple operations to unsassessment statutoge and data acquisition program; data acquisited to internal memory and CF Cards downloaded vi FF Perser function; simple operations to unsassessment statutoge and data acquisition program; data acquisited to internal memory and CF Cards downloaded vi FF Perser function; simple operations to unsassessment statutoge and data acquisition program; data acquisited to internal memory and CF Cards downloaded vi FF Perser function; simple operation to unsassessment statutoge and data acquisition program; data acquisition pro		
Number of data  For anally in Channels, (16-mage datas / n) datas  Durability of battery  Backup battery for chock and setting conditions: battery life of at least 10 years, For measurement data: none (at 23 °C/73*F)  No. of connectable units  Environmental conditions  Softy 1: Endolito Endo: 120 channels)  Softy 2: Endolito Endo: 120 channels  Softy 3: Endolito Endo: 120 channels  Softy 3: Endolito Endo: 120 channels  Softy 4: Endo: 120 channels  Control Land Endo: 120 channels  Softy 5: Endo: 120 channels  Softy 5: Endo: 120 channels  Softy 6: Endo		
Number of data Durability of battery No. of connectable units Sackup battery for clock and setting conditions battery life of at least 10 years. For measurement data: none (as 23 °C73°F) Sockup battery for clock and setting conditions battery life of at least 10 years. For measurement data: none (as 23 °C73°F) Sockup battery for clock and setting conditions Conforming standards Safety: ENGINO. EME of ENGINO. 240 (BET. 30 89% ft. Storage temperature and humidity: 10 (BT) to 50°C (BT) 50% for less, (see condensating) Conforming standards Safety: ENGINO. EME of ENGINO. 240 VAC. 5000 Bt. 2 (31 EV Battery (voltage may range from -30% to 40%. Please contact HIOKI for consection code). Disage that the consected with 8 units Dimensions & Mass Approx. Of mm (26 4 in W x 133 mm 62.34 in H x 125 mm 492 in D. 600 g (21 2 oo Operating Manual xl., Quick Start Manual xl. AC ADAPTER 9418-15 xl., USB cable xl., Connection Plate xl., CD-R (data collection software Logger Utilitys) xl., Connector cover xl., Ferrite clamp xl  PC Interface Data storage media Interface LAN: supports 1008as-TX. DHCP. DNS USB: yer 20, min. B receptacle PC control Data storage media Interface LAN: supports 1008as-TX. DHCP. DNS USB: yer 20, min. B receptacle Data storage media Interface LAN: supports 1008as-TX. DHCP. DNS USB: yer 20, min. B receptacle Operating supports 1008as-TX. DHCP. DNS USB: yer 20, min. B receptacle Operating on the connected measurement crieria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards. downloaded via FTP server function; simple operations (neasurement stantstop and data acquisition to internal memory) are available via HTTP server function  Function Specifications  Major Functions  Major Functions  Major Function  Type of the Cards of the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or a medies sloop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for ev		
Durability of battery   Rackup battery for clock and setting conditions: battery life of at least 10 years, For measurement data: none (at 23°C/73°F)		
No. of connectable units Environmental conditions Operating temperature and humidity: 0:02719 o 4PC (0817), 30 to 89% th. Storage temperature and humidity: 10:0719 to 9PC (0227), 80% th or less, tose-condensing) Conforming standards Safety: Est (Shi(10), EMC: Est (Shi(12), EMC: Est (Shi(10)), EMC: Est (Shi(12), EMC: Est (Shi(10)), EST (Shi(10)), EMC: Est (Shi(10)), EST (Shi(10)), EST (Shi(10)), EST (Shi(10)), EST (Shi(10))		
Environmental conditions  Operating temperature and humidity: 0.0279; 10.407 (10479; 30 to 80% th. Storage temperature and humidity: 1.010479; 0.507 (1227); 80% thor less, (non-oundematura)  Conforming standards  Power supply  (1) Using the AC ADAPTER 9418-15; 100 to 240 VAC, 5040 Hz (2) 12 V Battery deltage may range from -20% to +30%. Please contact HIOK1 for connection coedly.  Power consumption  20 VA (when connected with 8 units)  Dimensions & Massa Approx. 67 mm (2.64 in) W x 133 mm (5.24 in) H x 125 mm (4.92 in) D, 600 g (21.2 oz)  Accessories  Operating Manual x1, Quick Start Manual x1, AC ADAPTER 9418-15 x1, USB cable x1, Connection Plate x1, CD-R (data collection software "Logger Utility") x1, Connector cover x1, Ferrite clamp x1  PC Interface  Data storage media  Interface  LAN : supports 1008ase-TX, DHCP, DNS  USB : Ver 2.0, mini-B receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program: data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory are available via HTTP server function  Function Specifications  Major Functions  Measurement  Depending on the connected measurement unit: Temperature thermocouple, PD, voltage, humidity (used optional sensor), totalized pulses (addition, narray), rotation count, digital signal  Real time save  Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an enclass loop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 s; 1, 2, 5, 10, 20 and 30 min; and 11 hr (the low-speed setting divided by the high-speed setting must be an integer in the maximum 120 channels, depend on number of the input unit.  External Trigger when entering or exiting ran		
Conforming standards  Safety: ENGIOIO.EMC: ENGI326, ENGIOOO.3-2, ENGIOOO.3-2  POWER CONSUMPTION  10 Using the AC ADAPTER 9418-15, 00 to 240 VAC, 50/00 Hz (2) 12 V Battery two large may range from -20% to +30%. Please contact HIOKI for connection coedl. Power consumption  20 VA (when connected with 8 units)  Dimensions & Mass  Approx. 67 mm (2.64 in) W × 133 mm (5.24 in) H × 125 mm (4.92 in) D, 600 g (2) 2 co)  Accessories  Operating Manual xl, Quick Start Manual xl, AC ADAPTER 9418-15 xl, USB cable xl, Connection Plate xl, CD-R (data collection software 'Logger Utility') xl, Connector cover xl, Ferrite clamp xl  PC Interface  Data storage media  CF card slot x 1, HIOKI 9726 (124MB), 9727 (256MB), 9728 (512MB), 9729 (10B), MS-DOS format  Interface  LAN1 supports 1009ase-TX, DHCP, DNS  USB 1 ver 2.0, min-18 receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory) are available via HTTP server function  Function Specifications  Major Functions  Measurement  Depending on the connected measurement unit: Temperature (thermoscopic, Pt), voltage, humidity (used optional sensor), totalized pulses (addition, instantly), rotation count, digital signal  Real time save  Dual sampling  10 Wo (high-spect and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 501; 12, 51, 02, 02 and 301; 12, 55, 102 a		
Power supply  (1) Using the AC ADAPTER 9418-15, 100 to 240 VAC, 50/60 Hz. (2) 12 V Battery (voltage may range from -20% to +30%, Please contact HIOKI for connection cond, Dower consumption  20 VAC (when connected with 8 units)  Dimensions & Mass  Approx. 67 mm (2.64 in) W × 133 mm (5.24 in) H × 125 mm (4.92 in) D, 600 g (212 oc)  Operating Manual xl, Quick Start Manual xl, AC ADAPTER 9418-15 xl, USB cable xl, Connection Plate xl, CD-R (data collection software 1.0gger Utility*) xl. Connector cover xl, Ferrite clamp xl  PC Interface  Data storage media  CF card slot x 1, HIOKI 9726 (128MB), 9727 (256MB), 9728 (12MB), 9729 (10B), MS-DOS format  Interface  LAN: supports 1008as-TX, DHCP, DNS  USB: Ver 2.0, mini-B receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (neasurement start/stop and data sequisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (neasurement start/stop and data sequisition to internal memory are available via HTTP server function  Major Functions  Major Functions  Measurement  Depending on the connected measurement unit: Temperature (thermocouple, Po, voltage, humidity (used optional sensor), totalized pulses (addition, mistariby), rotation count, digital signal  Measurement data are sweat as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or a endless loop with automatic deletion of oldest data.  Post high-speed and low-speed recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 s; 1, 2, 5, 10, 20 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer test than 1,000)  Trigger type  Trigger type  Level: Trigger when rising or falling through preset level  Window: Tri		
Dimensions & Mass Approx. 67 mm (24 mi) W x 13 mm (324 m) H x 125 mm (492 m) D, 600 g (212 oz) Accessories Operating Manual xl. (264 mi) W x 133 mm (324 m) H x 125 mm (492 m) D, 600 g (212 oz) Accessories OPERATOR OPERA		
Dimensions & Mass   Approx. 67 mm (2.64 in) W x 133 mm (5.24 in) H x 125 mm (4.92 in) D, 600 g (21.2 oz)		
Accessories  Operating Manual x1, Quick Start Manual x1, AC ADAPTER 9418-15 x1, USB cable x1, Connection Plate x1, CD-R (data collection software 'Logger Utility') x1, Connector cover x1, Perrite clamp x1  PC Interface  Data storage media Interface  LAN; supports 1008ase-TX, DHCP, DNS USB; Ver 2.0, mini-B receptacle  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory) are available via HTTP server function.  Function Specifications  Major Functions  Control the input units, or output units, Communication to the PC, Data storage to the CF card  Measurement parameters  Dending on the connected measurement unit: Temperature (thermocouple, PO), voltage, humidity (used optional sensor), totalized pulses (addition, instantly), rotation count, digital signal  Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.  Dual sampling  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 30 st; 1, 2, 5, 10, 20 and 30 st;	•	
Data storage media Interface  LAN: supports 100Base-TX, DHCP, DNS USB: Ver 2.0, min-B receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory) are available via HTTP server function  Function Specifications  Major Functions  Major Functions  Control the input units, or output units, Communication to the PC, Data storage to the CF card  Measurement parameters  Depending on the connected measurement unit: Temperature (thermocouple, Pt), voltage, humidity (used optional sensor), totalized pulses (addition, instantly), rotation count, digital signal  Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 st; 1, 2, 5, 10, 20 and 30 mir; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)  Marking  Event mark input: Press [Start / Stop   Kspr x measuremet  Trigger function  Mode: Single / Repeat, Timing: Start / Stop / Start & Stop. Pre-Trigger: records period before trigger, can be set for real-time saving  Analog input: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger source, Trigger condition settable for each channels  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Trigger level resolution : 0.1 % fs. Logic: 1, 0, x	Accessories	Operating Manual x1, Quick Start Manual x1, AC ADAPTER 9418-15 x1, USB cable x1, Connection Plate x1, CD-R (data collection software
Data storage media Interface  LAN: supports 100Base-TX, DHCP, DNS USB: Ver 2.0, min-B receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory) are available via HTTP server function  Function Specifications  Major Functions  Major Functions  Control the input units, or output units, Communication to the PC, Data storage to the CF card  Measurement parameters  Depending on the connected measurement unit: Temperature (thermocouple, Pt), voltage, humidity (used optional sensor), totalized pulses (addition, instantly), rotation count, digital signal  Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 st; 1, 2, 5, 10, 20 and 30 mir; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)  Marking  Event mark input: Press [Start / Stop   Kspr x measuremet  Trigger function  Mode: Single / Repeat, Timing: Start / Stop / Start & Stop. Pre-Trigger: records period before trigger, can be set for real-time saving  Analog input: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger source, Trigger condition settable for each channels  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Trigger level resolution : 0.1 % fs. Logic: 1, 0, x	PC Interface	
LAN: supports 100Base-TX, DHCP, DNS USB: Ver 2.0, mini-B receptacle  PC control  Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory) are available via HTTP server function  Major Functions  Control the input units, or output units, Communication to the PC, Data storage to the CF card  Depending on the connected measurement unit: Temperature (thermocouple, P0, voltage, humidity (used optional sensor), totalized pulses (addition, instantly), rotation count, digital signal  Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 si; 1, 2, 5, 10, 20 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)  Marking  Event mark input: Press [Start / Stop / Start & Stop. Pre-Trigger: records period before trigger, can be set for real-time saving  Mode: Single/Repeat, Timing: Start / Stop / Start & Stop. Pre-Trigger: records period before trigger, can be set for real-time saving  Analog input: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger source, Trigger condition settable for each channels  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger condition settable for each channels  Finger evel resolution to 1.0 % Es. Logic: 1, 0, Ne Pattern trigger  Rise up: Low level (0 to 1.0		CF card slot x 1. HIOKI 9726 (128MR) 9727 (256MR) 9728 (512MR) 9729 (IGR) MS_DOS format
Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards downloaded via FTP server function; simple operations (measurement start/stop and data acquisition to internal memory) are available via HTTP server function  Function Specifications  Major Functions  Control the input units, or output units, Communication to the PC, Data storage to the CF card  Depending on the connected measurement unit: Temperature (thermocouple, Pt), voltage, humidity (used optional sensor), totalized pulses (addition, parameters  Real time save  Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an encless loop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 s; 1, 2, 5, 10, 20 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)  Marking  Event mark input: Press [Start / Stop] key at measuremet  Trigger function  Mode: Single / Repeat, Timing: Start / Stop / Start & Stop, Pre-Trigger: records period before trigger, can be set for real-time saving  Analog input: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger source, Trigger condition settable for each channels  External trigger when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Trigger level resolution: 0.1 % f.s. Logic: 1, 0, x Pattern trigger  Rise up: 1.0 week (0 to 1.0 V) to High level (2.5 V to 5.0 V) to Low level (0		
Major Functions         Control the input units, or output units, Communication to the PC, Data storage to the CF card           Measurement parameters         Depending on the connected measurement unit: Temperature (thermocouple, Pt), voltage, humidity (used optional sensor), totalized pulses (addition, instandly), rotation count, digital signal           Real time save         Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.           Dual sampling         Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)           Marking         Event mark input: Press [Start / Stop] key at measuremet           Trigger function         Mode: Single / Repeat, Timing: Start / Stop / Start & Stop. Pre-Trigger: records period before trigger, can be set for real-time saving           Analog input: Maximum 120 channels, depend on number of the input unit. Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit. External trigger: Rise up or fall down of the external input signal (selectable) Logical AND or OR for each trigger source, Trigger condition settable for each channels           External trigger         Level: Triggers when rising or falling through preset level Window: Triggers when entering or exiting range defined by preset upper and lower limit values Trigger level resolution: 0.1 % f.s. Logic: 1, 0, x Pattern trigger           External trigger	PC control	Data acquisition and measurement criteria settings are controlled by the PC data acquisition program; data acquired to internal memory and CF Cards i
Major Functions         Control the input units, or output units, Communication to the PC, Data storage to the CF card           Measurement parameters         Depending on the connected measurement unit: Temperature (thermocouple, Pt), voltage, humidity (used optional sensor), totalized pulses (addition, instandly), rotation count, digital signal           Real time save         Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.           Dual sampling         Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)           Marking         Event mark input: Press [Start / Stop] key at measuremet           Trigger function         Mode: Single / Repeat, Timing: Start / Stop / Start & Stop. Pre-Trigger: records period before trigger, can be set for real-time saving           Analog input: Maximum 120 channels, depend on number of the input unit. Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit. External trigger: Rise up or fall down of the external input signal (selectable) Logical AND or OR for each trigger source, Trigger condition settable for each channels           External trigger         Level: Triggers when rising or falling through preset level Window: Triggers when entering or exiting range defined by preset upper and lower limit values Trigger level resolution: 0.1 % f.s. Logic: 1, 0, x Pattern trigger           External trigger	Function Specifica	ations
Instantly), rotation count, digital signal	Major Functions	
an endless loop with automatic deletion of oldest data.  Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: 10, 20, 50, 100, 200 and 500 ms; 1, 2, 5, 10, 20 and 30 s; 1, 2, 5, 10, 20 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)  Marking  Event mark input: Press [Start / Stop] key at measuremet  Trigger function  Mode: Single / Repeat, Timing: Start / Stop / Start & Stop, Pre-Trigger: records period before trigger, can be set for real-time saving  Analog input: Maximum 120 channels, depend on number of the input unit.  Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger source, Trigger condition settable for each channels  Level: Triggers when rising or falling through preset level  Window: Triggers when rising or falling through preset level  Window: Trigger level resolution: 0.1 % f.s. Logic: 1, 0, × Pattern trigger  External trigger  Signal  Rise up: Low level (0 to 1.0 V) to High level (2.5 V to 5.0 V)  Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short  Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 μs (Low period at filter OFF, more than 2.5 ms (High period), more than 4 ms (Low period) at filter ON  Alarm output  Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)  Level: Triggers when rising or falling through preset level  Window: Triggers when rising or falling through preset level  Window: Triggers when rising or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern  Output latch settings: latch / no latch	Measurement parameters	
1, 2, 5, 10, 20 and 30 s; 1, 2, 5, 10, 20 and 30 min; and 1 hr (the low-speed setting divided by the high-speed setting must be an integer less than 1,000)    Marking	Real time save	Measurement data are saved as binary data to the CF Card in real time, and can be saved to separate files at preset times, selectable as full files or an endless loop with automatic deletion of oldest data.
Trigger function  Mode: Single / Repeat, Timing: Start / Stop / Start & Stop, Pre-Trigger: records period before trigger, can be set for real-time saving  Analog input: Maximum 120 channels, depend on number of the input unit.  Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger condition settable for each channels  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Trigger level resolution: 0.1 % f.s. Logic: 1, 0, × Pattern trigger  Rise up: Low level (0 to 1.0 V) to High level (2.5 V to 5.0 V)  Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short  Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 μs (Low period at filter OFF, more than 2.5 ms (High period), more than 4 ms (Low period) at filter ON  Alarm output  Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern  Output latch settings: latch / no latch	Dual sampling	Two (high-speed and low-speed) recording intervals can be specified for every input module from the following: $10, 20, 50, 100, 200$ and $500$ ms; $1, 2, 5, 10, 20$ and $30$ s; $1, 2, 5, 10, 20$ and $30$ min; and $1$ hr (the low-speed setting divided by the high-speed setting must be an integer less than $1,000$ )
Analog input: Maximum 120 channels, depend on number of the input unit.  Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)  Logical AND or OR for each trigger condition settable for each channels  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Trigger level resolution: 0.1 % f.s. Logic: 1,0, × Pattern trigger  Rise up: Low level (0 to 1.0 V) to High level (2.5 V to 5.0 V)  Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short  Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 µs (Low period) at filter OFF, more than 2.5 ms (High period), more than 4 ms (Low period) at filter ON  Alarm output  Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern  Output latch settings: latch / no latch	Marking	Event mark input: Press [Start / Stop] key at measuremet
Trigger source  Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit. Logic inputs: Maximum 120 channels, depend on number of the input unit. External trigger: Rise up or fall down of the external input signal (selectable) Logical AND or OR for each trigger source, Trigger condition settable for each channels  Level: Triggers when rising or falling through preset level Window: Triggers when entering or exiting range defined by preset upper and lower limit values Trigger level resolution: 0.1 % f.s. Logic: 1, 0, x Pattern trigger  Rise up: Low level (0 to 1.0 V) to High level (2.5 V to 5.0 V) Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 μs (Low perio at filter OFF, more than 2.5 ms (High period), more than 4 ms (Low period) at filter ON  Alarm output  Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)  Level: Triggers when rising or falling through preset level Window: Triggers when entering or exiting range defined by preset upper and lower limit values Logic pattern: agreement (or disagreement) in the specified pattern Output latch settings: latch / no latch	Trigger function	Mode: Single / Repeat, Timing: Start / Stop / Start & Stop, Pre-Trigger: records period before trigger, can be set for real-time saving
Trigger type  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Trigger level resolution: 0.1 % f.s. Logic: 1, 0, × Pattern trigger  Rise up: Low level (0 to 1.0 V) to High level (2.5 V to 5.0 V)  Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short  Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 μs (Low period at filter OFF, more than 2.5 ms (High period), more than 4 ms (Low period) at filter ON  Alarm output  Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern  Output latch settings: latch / no latch	Trigger source	Pulse totalizer inputs: Maximum 120 channels, depend on number of the input unit.  Logic inputs: Maximum 120 channels, depend on number of the input unit.  External trigger: Rise up or fall down of the external input signal (selectable)
Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 µs (Low perio at filter OFF, more than 2.5 ms (High period), more than 4 ms (Low period) at filter ON  Alarm output  Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)  Level: Triggers when rising or falling through preset level Window: Triggers when entering or exiting range defined by preset upper and lower limit values Logic pattern: agreement (or disagreement) in the specified pattern Output latch settings: latch / no latch	Trigger type	Window: Triggers when entering or exiting range defined by preset upper and lower limit values
Alarm type  Level: Triggers when rising or falling through preset level  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern  Output latch settings: latch / no latch	External trigger signal	Fall down: High level (2.5 V to 5.0 V) to Low level (0 to 1.0 V), or terminal short  Input voltage range: -5 V to 10 V, Filter ON/OFF possible, Pulse width response: more than 1 ms (High period), more than 2 µs (Low period)
Alarm type  Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern  Output latch settings: latch / no latch	Alarm output	Alarm Module 8997 can be connected along with various measurement modules (although it cannot be connected alone)
Start backup Possible	Alarm type	Window: Triggers when entering or exiting range defined by preset upper and lower limit values  Logic pattern: agreement (or disagreement) in the specified pattern
	Start backup	Possible

### ■ Specification

### ■ Bundled software specifications



Logger Utility	Logger Utility (bundled application software)						
Operating environment	One CD-R, CPU: Pentium 3 (500 MHz or more), at least 512 MB of memory Interface: USB, LAN (LAN not available with the Model 8430-20/-21) OS: Windows 2000 (SP4 or later) XP (SP2 or later) Vista (32-bit/ 64-bit) (Ver 1.50 or later) Windows 7 (32-bit/ 64-bit) (This software is compatible only to the MEMORY HILOGGER LR8400-20s, LR8400-21s, 8423, 8430-20/-21)						
Real-time data acquisition	Measurements on multiple loggers connected by LAN or USB can be controlled to sequentially acquire, display and save waveform data (for recording up to 10 million samples)  Number of controllable instruments: up to 5 units  Display: Waveforms (multiple time axis can be displayed), Numerical values (logging), Alarm status at the same time, Numerical value monitoring in a separate window, Waveform scroll while measuring  Data saving destination: Real-time data transfer to EXCEL (new function), or Real-time data acquisition file (LUW format, only for HIOKI)  Event marks: can be applied while recording						
Data acquisition settings	Data acquisition settings for the HiLOGGER Saving: The setting for multiple HiLOGGERs can be saved together in one file (LUS format); Instrument configuration settings can be sent and received						
Waveform display	Processed data file: Real-time data acquisition file (LUW format), Record to internal memory data (MEM format)  Display format: Simultaneously display waveform and numerical value, (time-axis divided display possible)  Maximum number of channels: 600 channels (measurement data, used with the 8423) + 60 channels (waveform processing data)  Others: Waveform display on sheet for each channel, scroll, record event mark, cursor, hard copy, numerical value display						

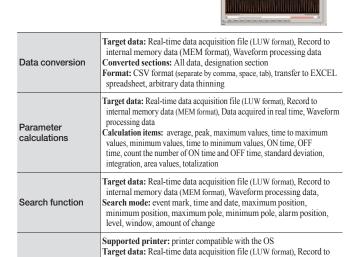

settings, event, cursor value)

Print preview: supported

internal memory data (MEM format), Waveform processing data

Print format: waveform image, report format, list print (channel

Print area: the entire area, area between cursors A and B

Processing items: Four arithmetic operations

Number of processing channels: 60 channerls



Input

### VOLTAGE/TEMP UNIT 8948 (accuracy specified @23 ±5°C/73 ±9°F, 30 to 80% rh., from 30 minutes after power on and after zero point adjustment, accuracy and product guaranteed for one year)

Print function

Waveform

**Measurement parameters:** Voltage, Thermocouples (K, E, J, T, N, W, R, S, B)

Setting Range Measurement range Resolution Accuracy

Terminal: M3 (mm) screw terminals (2 terminals/1ch), terminal block removable, supplied terminal block cover

Number of channels: 15 channels isolated from each other and chassis, (voltage or thermocouple selectable for each channels)

**Input impedance:**  $1M\Omega$  (850k $\Omega$  when open-circuit polling is enabled)

		100mV f.s.	-150mV to +150mV	5μV	
		1V f.s.	-1.5V to +1.5V	50μV	±0.1% f.s.
	V-4	10V f.s.	-15V to +15V	500μV	
	Voltage	20V f.s.	-30V to +30V	1mV	Note: at 1-5 V
		100V f.s.	-100V to +100V	5mV	range, f.s.=10 V
		1-5V f.s.	1V to 5V	500μV	
		Setting Range	Measurement range	Resolution	Accuracy
		K 100°C f.s.	-100°C to 100°C	0.01°C	
		K 500°C f.s.	-200°C to 500°C	0.05°C	
Measurement		K 2000°C f.s.	-200°C to 1350°C	0.1°C	
parameters		E 100°C f.s.	-100°C to 100°C	0.01°C	
		E 500°C f.s.	-200°C to 500°C	0.05°C	
		E 2000°C f.s.	-200°C to 1000°C	0.1°C	
	Thermocouples	J 100°C f.s.	-100°C to 100°C	0.01°C	
	Excluding standard	J 500°C f.s.	-200°C to 500°C	0.05°C	±0.05% f.s. ±1°C
	reference contact accuracy	J 2000°C f.s.	-200°C to 1200°C	0.1°C	
		T 100°C f.s.	-100°C to 100°C	0.01°C	
		T 500°C f.s.	-200°C to 400°C	0.05°C	
		T 2000°C f.s.	-200°C to 400°C	0.1°C	
		N 100°C f.s.	-100°C to 100°C	0.01°C	
		N 500°C f.s.	-200°C to 500°C	0.05°C	
		N 2000°C f.s.	-200°C to 1300°C	0.1°C	

	Setting Range	Measurement range	Resolution	Accuracy
	R 100°C f.s.	0°C to 100°C	0.01°C	
	R 500°C f.s.	0°C to 500°C	0.05°C	
	R 2000°C f.s.	0°C to 1700°C	0.1°C	±0.05% f.s. ±3.5°C
	S 100°C f.s.	0°C to 100°C	0.01°C	(0°C to less than 400°C)
Thermocouples	S 500°C f.s.	0°C to 500°C	0.05°C	(Temperatures less than 400°C measured by B
Excluding standard reference contact	S 2000°C f.s.	0°C to 1700°C	0.1°C	thermocouples are not
accuracy	B 2000°C f.s.	0°C to 1800°C	0.1°C	guaranteed for accuracy)
	W: Wre5-26			±0.05% f.s. ±2°C
	W 100°C f.s.	0°C to 100°C	0.01°C	(400°C and above)
	W 500°C f.s.	0°C to 500°C	0.05°C	
	W 2000°C f.s.	0°C to 2000°C	0.1°C	

١	Standard reference contact			
		±0.5°C (K, E, J, T) ±1.0°C (N, R, S, B, W)		
	Switching	Switchable between internal and external		
ı				

A/D conversion	Resolution: 16 bit, Maximum sampling speed: 10 ms						
Filter function	Digital filter: OFF, 50 Hz, 60 Hz (With 50 and 60 Hz settings, the digital filter is automatically set according to recording interval)						
	Max. allowable input: 100 V DC (maximum voltage between input terminals that does not cause damage), Max. rated voltage between channels: 200 V DC Max. rated voltage to earth: 600 V DC, AC (Upper limit voltage that does not cause damage when applied between input channel and chassis, and between each input channels)						
Conforming standards	Safety: EN61010, EMC: EN61326						
Dimensions & Mass	Approx. 38.5 mm (1.52 in) W × 133 mm (5.24 in) H × 141.2 mm (5.56 in) D mm, 550 g (19.4 oz)						
Accessories	Connection Plate ×1. Operating Manual ×1						

### ■ Specification

### **UNIVERSAL UNIT 8949**

(accuracy specified @23 ±5°C/73 ±9°F, 30 to 80% rh., from 30 minutes after power on and after zero point adjustment, accuracy and product guaranteed for one year)

Input

Measurement parameters: Voltage, Thermocouples (K, E, J, T, N, W, R, S, B), Resistance temperature sensor (Pt 100, JPt 100), Humidity (only use with the Model 9701 sensor) Terminal: Screw-type terminals (4 terminals/1ch), terminal block removable, supplied terminal block cover Number of channels: 15 channels (input type selectable for each channels), Iisolated from each other and chassis (at voltage or thermocouples), Not isolated from each other and common GND (at resistance temperature sensor or humidity) Input impedance:  $1M\Omega$  (850k $\Omega$  when open-circuit polling is enabled at thermocouples),  $2M\Omega$  (when resistance temperature sensor)

		Setting Range	Measurement range	Resolution	Accuracy
		100mV f.s.	-150mV to +150mV	5μV	
		1V f.s.	-1.5V to +1.5V	50μV	±0.1% f.s.
	Valtage	10V f.s.	-15V to +15V	500μV	±0.1% 1.8.
	Voltage	20V f.s.	-30V to +30V	1mV	Note: at 1-5 V
		100V f.s.	-60V to +60V	5mV	range, f.s.=10 V
		1-5V f.s.	1V to 5V	500μV	
		Setting Range	Measurement range	Resolution	Accuracy
		K 100°C f.s.	-100°C to 100°C	0.01°C	
		K 500°C f.s.	-200°C to 500°C	0.05°C	
		K 2000°C f.s.	-200°C to 1350°C	0.1°C	
Measurement		E 100°C f.s.	-100°C to 100°C	0.01°C	
parameters		E 500°C f.s.	-200°C to 500°C	0.05°C	
		E 2000°C f.s.	-200°C to 1000°C	0.1°C	
	Thermocouples	J 100°C f.s.	-100°C to 100°C	0.01°C	
	Exclude the standard reference contact	J 500°C f.s.	-200°C to 500°C	0.05°C	±0.05% f.s. ±1°C
	accuracy	J 2000°C f.s.	-200°C to 1200°C	0.1°C	
		T 100°C f.s.	-100°C to 100°C	0.01°C	
		T 500°C f.s.	-200°C to 400°C	0.05°C	
		T 2000°C f.s.	-200°C to 400°C	0.1°C	
		N 100°C f.s.	-100°C to 100°C	0.01°C	
		N 500°C f.s.	-200°C to 500°C	0.05°C	1
		N 2000°C f.s.	-200°C to 1300°C	0.1°C	

		Setting Range	Measurement range	Resolution	Accuracy
		R 100°C f.s.	0°C to 100°C	0.01°C	
		R 500°C f.s.	0°C to 500°C	0.05°C	
		R 2000°C f.s.	0°C to 1700°C	0.1°C	±0.05% f.s. ±3.5°C
		S 100°C f.s.	0°C to 100°C	0.01°C	(0°C to less than 400°C)
	Thermocouples	S 500°C f.s.	0°C to 500°C	0.05°C	(Temperatures less than 400°C measured by B
	Exclude the standard	S 2000°C f.s.	0°C to 1700°C	0.1°C	thermocouples are not
1	reference contact accuracy	B 2000°C f.s.	0°C to 1800°C	0.1°C	guaranteed for accuracy)
l		W: Wre5-26			±0.05% f.s. ±2°C
		W 100°C f.s.	0°C to 100°C	0.01°C	(400°C and above)
		W 500°C f.s.	0°C to 500°C	0.05°C	
		W 2000°C f.s.	0°C to 2000°C	0.1°C	
1					

Standard reference contact accuracy with internal compensation, add to measurement accuracy	±0.5°C (K, E, J, T) ±1.0°C (N, R, S, B, W)
Switching	Switchable between internal and external

	Setting Range	Measurement range	Resolution	Accuracy
Resistance	100°C f.s.	-100°C to 100°C	0.01°C	
temperature sensor	500°C f.s.	-200°C to 500°C	0.05°C	±0.05% f.s. ±0.5°C
Pt 100, JIS C 1604-1997	2000°C f.s.	-200°C to 800°C	0.1°C	
Resistance	100°C f.s.	-100°C to 100°C	0.01°C	
temperature sensor	500°C f.s.	-200°C to 500°C	0.05°C	±0.05% f.s. ±0.5°C
JPt 100, JIS C 1604-1989	2000°C f.s.	-200°C to 500°C	0.1°C	
Humidity	100% rh	5.0 to 95.0% rh	0.1% rh	Refer to the accuracy table

A/D conversion	Resolution: 16 bit, Maximum sampling speed: 10 ms (5 s when combined with humidity measurement)
Filter function	Digital filter: OFF, 50 Hz, 60 Hz (With 50 and 60 Hz settings, the digital filter is automatically set according to recording interval)
	Max. allowable input: 60 V DC (maximum voltage between input terminals that does not cause damage), Max. rated voltage between channels: 120 V DC Max. rated voltage to earth: 600 V DC, AC (Upper limit voltage that does not cause damage when applied between input channel and chassis, and between each input channels)
Conforming standards	Safety: EN61010, EMC: EN61326
Dimensions & Mass	Approx. 38.5 mm (1.52 in) W × 133 mm (5.24 in) H × 141.2 mm (5.56 in) D mm, 530 g (18.7 oz)
Accessories	Flat-blade Screwdriver ×1 (for terminal block), Connection Plate ×1, Operating Manual ×1



or 9701 accuracy



### **DIGITAL/PULSE UNIT 8996**

(product guaranteed for one year)

Input signal condition: No-voltage 'a' contact (normally open contact), open collector or voltage input, Digital / Pulse input selectable for each channels Measurement parameters: Voltage, Totalized pulses (integrated or instantaneous), Rotation count, ON/OFF digital signal Input Terminal: M3 (mm) screw terminals (2 terminals/1ch), terminal block removable, supplied terminal block cover Number of channels: 15 channels (digital / pulse selectable for each channels) (common ground for CH-1 to CH-5, common ground for CH-6 to CH-10, common ground for CH-11 to CH-15) Input impedance:  $1.1M\Omega$ 

Pulse input		Setting Range	Measurement range	Resolution		Pulse input period		
	Totalized pulses	1,000M pulse f.s.	0 to 1,000M pulse	1 pulse		with filter OFF	200 μs or more (both H and L periods must be at least 100 μs)	
	Rotation count	5,000/n (r/s) f.s.	0 to 5,000/n (r/s)	1/n (r/s)		with filter ON	100 ms or more (both H and L periods must be at least 50 ms)	
		Note: $n = pulses per rotation (1 to 1,000)$				Filter	Chatter-prevention filter: can be set ON/OFF for each channels	
						Slope	Rising or falling edge can be set for each channel	
Digital input	Logic detection         HIGH = at least 1.0 V, LOW = 0 to 0.5 V           level         HIGH = at least 4.0 V, LOW = 0 to 1.5 V						HIGH = at least 1.0 V, LOW = 0 to 0.5 V HIGH = at least 4.0 V, LOW = 0 to 1.5 V	
Max. allowable input	50 V DC (maximum voltage between input terminals that does not cause damage)							

Max. rated voltage to earth 600 V DC, AC (Upper limit voltage that does not cause damage when applied between CH-1 to CH-5 each channel and chassis, CH-6 to CH-10 each channel and chassis, CH-11 to CH-15 each channel and chassis, and between each UNITs) Max. rated voltage to each

33 V AC rms, 70 V DC (Upper limit voltage that does not cause damage when applied between CH-1 to CH-5 each channel and CH-6 to CH-10 each channel, CH-6 to CH-10 each channel and CH-11 to CH-15 each channel, CH-1 to CH-5 each channel and CH-11 to CH-15 each channel, CH-10 to CH-10 each channel and CH-11 to CH-15 each channel.

Conforming standards Safety: EN61010, EMC: EN61326 Dimensions & Mass Approx. 38.5 mm (1.52 in) W × 133 mm (5.24 in) H × 141.2 mm (5.56 in) D mm, 500 g (17.6 oz)

Connection Plate ×1, Operating Manual ×1

### ALARM UNIT 8997 (product guaranteed for one year)

Accessories

Output	Output type: open collector (active low) Alarm parameters: Use up to 15 channels in response to analog input, pulse input, rotation count, or ON/OFF digital signa Terminal: M3 (mm) screw terminals (2 terminals/1ch) Number of channels: 15 channels isolated from each other and chassis					
Output sink current	Maximum switching capability: 5 to 60 V DC @10 mA (open collector drive)					
Output refresh	Output latch settings: Latch / No latch at every recording interval					
Max. rated voltage to earth	600 V DC, AC (Upper limit voltage that does not cause damage when applied between each output channel and chassis, and between each units)					
Max. rated voltage to each channels	33 V AC rms, 70 V DC (Upper limit voltage that does not cause damage when applied between each output channels)					
Conforming standards	Safety: EN61010, EMC: EN61326					
Dimensions & Mass	Approx. 38.5 mm (1.52 in) W × 133 mm (5.24 in) H × 141.2 mm (5.56 in) D mm, 500 g (17.6 oz)					
Accessories	Connection Plate ×1, Operating Manual ×1					



### **Options in Detail**

measurement

#### Main unit and input or output module



Note: 8423 cannot operate alone. You must install one or more optional input modules in the unit. Thermocouples are not provided by HIOKI, and must be purchased fron

MEMORY HIL OGGER 8423 Maximum number of connectable units: 8



**VOLTAGE/TEMP UNIT 8948** 15-channles, Voltage, Thermocouple input



UNIVERSAL UNIT 8949 15-channels, Voltage, Thermocouple, Resistance temperature sensor, Humidity



DIGITAL/PULSE UNIT 8996

15-channels, ON/OFF logic signal, Totalized pulses (integrated or instantaneous), Rotation count



**ALARM UNIT 8997** 15-channels, Open-collector output





AC ADAPTER 9418-15 Universal 100 to 240 V AC, 12 V DC/ 2.5 A output



LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross conversion cable, 5 m (16.41 ft) length



CONNECTION CABLE 9683

For synchronization, cable length 1.5 m (4.92 ft)



#### **HUMIDITY SENSOR** 9701

1-channel, for UNIVERSAL UNIT 8949



may be unable to read from or save


Supplied with PC Card adapter PC CARD 1G 9729


(1 GB capacity) PC CARD 512M 9728 (512 MB capacity)

PC CARD 256M 9727 Use only PC Cards sold by HIOKI Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You (256 MB capacity)


Note: The PC CARD 2G 9830 is not usable with the Model 8423

#### ■ Appearance/Dimension Illustration






380.3 mm (14.97 in)








Model 8996

Model 8997





■ Configuration Examples



Input unit x 1 15-channels Isolated

Model 8423 x 1 Model 8948 x 1



Input unit x 2 30-channels Isolated

Model 8423 x 1 Model 8948 x 2



Input unit x 4 60-channels Isolated

Model 8423 x 1 Model 8948 x 4



Input unit x 8 120-channels Isolated

Model 8423 x 1 Model 8948 x 8



(Input unit × 8) system × 2 240-channels Isolated

Model 8423 x 2 Model 8948 x 16 Synchronization cable 9683 x 2

(Input unit x 8) system x 4

480-channels Isolated

Synchronization cable 9683 x 4

Model 8423 x 4

Model 8948 x 32



(Input unit x 8) system x 5 600-channels Isolated

Model 8423 x 5 Model 8948 x 40 Synchronization cable 9683 x 5

### HIOKI E.E. CORPORATION

### **HEAD OFFICE:**

81 Koizumi, Ueda, Nagano, 386-1192, Japan TEL +81-268-28-0562 / FAX +81-268-28-0568 http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

### **HIOKI USA CORPORATION:**

6 Corporate Drive, Cranbury, NJ 08512 USA TEL +1-609-409-9109 / FAX +1-609-409-9108 http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

### Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies

HIOKI (Shanghai) Sales & Trading Co., Ltd.: 1608-1610 Shanghai Times Square Office, 93 Huai Hai Zhong Road, Shanghai, P.R.China POSTCODE: 200021 TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360 http://www.hioki.cn / E-mail: info-sh@hioki.com.cn

**Beijing Office :** TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090

E-mail: info-bj@hioki.com.cn

### Guangzhou Office:

TEL +86-20-38392673/2676 FAX +86-20-38392679 E-mail: info-gz@hioki.com.cn

### HIOKI INDIA PRIVATE LIMITED:

Nandel House, 24 Gulmohar Colony Indore 452 018 (M.P.), India TEL+91-731-4223901, 4223902 FAX+91-731-4223903 http://www.hioki.in/E-mail: info@hioki.in

DISTRIBUTED BY